


T30C


Optical fiber cleaver

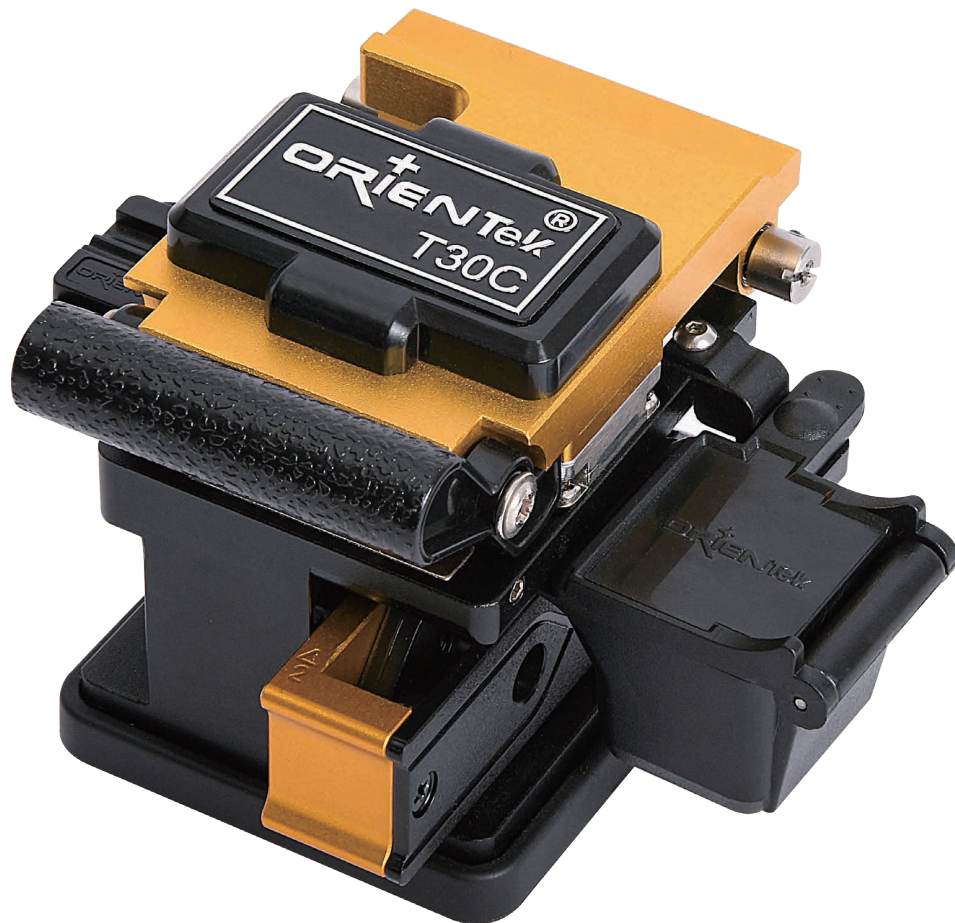


Functions

- Cleaved Angel <math><0.5</math> degrees
- High capacity waste bin
- 48,000 times cutting life
- Universal fiber holder for 250 μ m / 900 μ m / 3.0mm fiber cable
- Simple 2 step operations
- Automatic Return of Blade
- 3-in-1 fixture, 0.25~3.0mm

Product features:

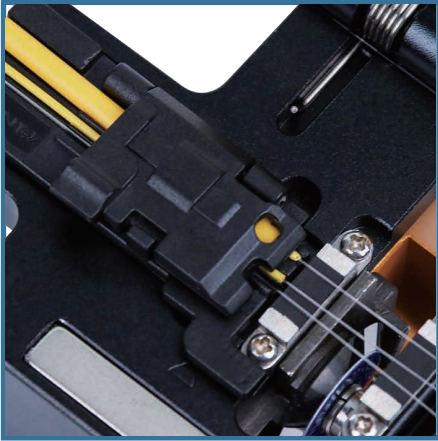

Universal Fiber Holder

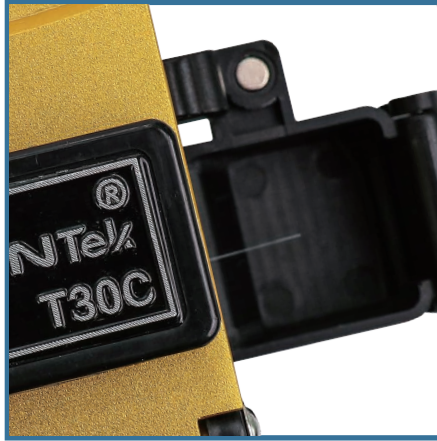

High Capacity Waste Bin



Rubber Armor Protection


specification:

Fiber Types	single fiber
Coating Diameter	$\phi 0.25\&0.9$
Clad Diameter	125 μ m
Cleaved Angel	≤ 0.5 degrees
Cleave Length	9–16mm($\phi 0.25$) 10–16mm($\phi 0.9$)
Blade Life	48000 fibers (2000 fibersx24 positions)
Dimensions	62Wx64Dx74H mm
Weight	350g

Standard Package:

Item	P/N	Quantity
T30C main body/blade	T30C-01	1
3-IN-1 Universal Fiber Holder	T30C-91	1
Large Capacity Fiber Waste Bin	T30C-11	1
Hexagonal Wrench	T30C-12	1
Semi-hard Case	T30C-13	1
Operation Manual	T30C-14	1

T30C

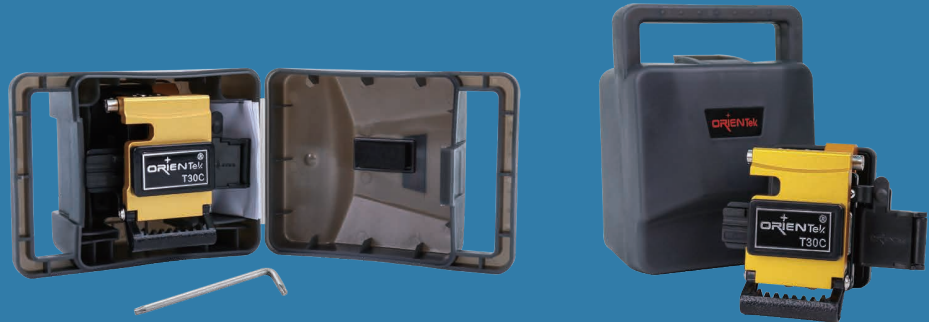

CONTACT US:

OrientTEK Optical Communication Ltd.

HEAD OFFICE:

Huaqiao Building, Qinheng Technology Park, North Bridge road,
Nanjing, Jiangsu, China

TEL: (+86) 25 58538261

FAX: (+86) 25 58538261

www.orientekot.com

sales@orientekot.com

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in China.

In addition, the Export Administration Regulations (EAR) of the United States may be applicable.

In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost. Please contact the Ministry of Economy, Trade and Industry of China or the Department of Commerce of the United States for details about procedures.