
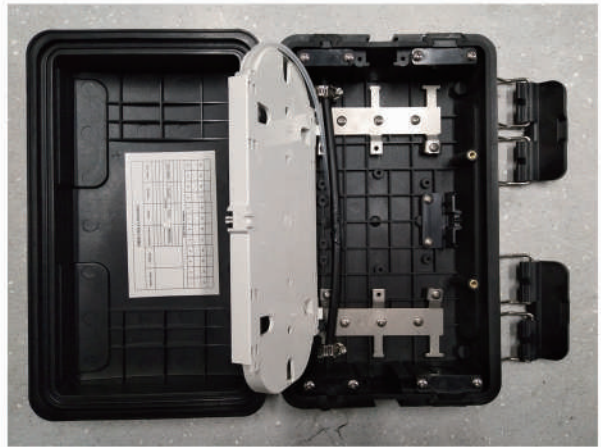


# FIBER OPTIC Splice Closure JZ-10077

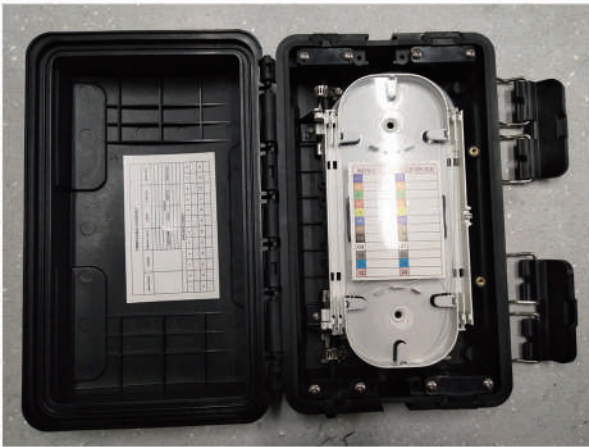

## General Description

The Splice closure is an indispensable equipment used in Fiber Communication System, play the roles in sealing, protection, installation of fiber connector head and storage. It is applicable well in cable splicing and with the protection function on fiber optic connect head.

## Features

- ◆ Suitable for straight-through, diverging and connection of FTTH, FTTB passive network
- ◆ Use material of high-strength PP plastics
- ◆ Corrosion resistant, aging resistant
- ◆ Trays can be increased and reduced according to the application.
- ◆ Good properties of dust, and moisture proofing

## Application

- Telecommunication subscriber loop
- Fiber to the home(FTTH)
- LAN/WAN

## Technical Data

Work Temperature	-40°C ~ +75°C
Relative Humidity	≤ 85%
Atmospheric Pressure	70Kpa~106Kpa
Standard	YD/T 814.1-2004
Cable Entrance	2*(8-20mm), 2*(5-14mm)
Max capacity	Splice: 24Core per tray, Max: 4Trays
Tension	800N/1min
Impact	1m/1kg Steel Ball/ three times

## Dimensions

